

# DIN Mount Stepdown Transformer




### FEATURES:



- 35 mm DIN Rail Mount
- Step Down to 24 VAC from 120, 240, or 480
- Works with HBControls HVP, HVQ, BF, PA, LPC, TP products and many more
- Small width, 1.25" wide
- Low power synchronization transformer

SPECIFICATIONS	PS-120	PS-120-3	PS-240	PS-240-3	PS-480	PS-480-3
Voltage	120	120	240	240	480	480
Frequency	50-60Hz	50-60Hz	50-60Hz	50-60Hz	50-60Hz	50-60Hz
mA Out	63	63	63	63	63	63
Volts Out (Vac)	24	24	24	24	24	24
No. Load Vac)	38	38	38	38	38	38

\*-3 = Three Phase

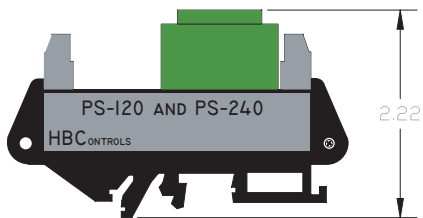

Single Phase Power Supply

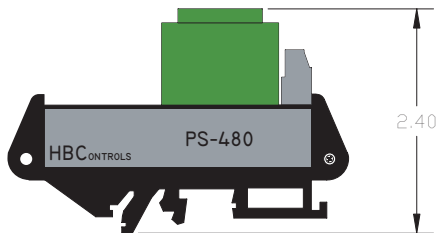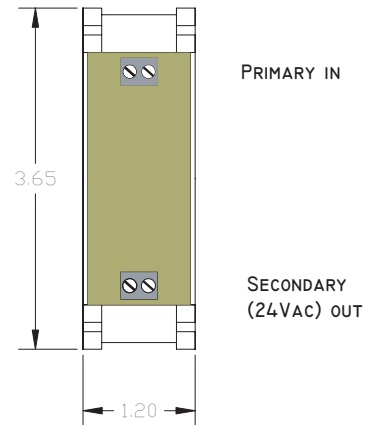

Three Phase Power Supply

